

Features:

- Jacket-cooled submersible motor pump made of stainless steel 1.4301
- Float switch (A) for automatic operation and dry-running protection
- Including cable H 07 RN-F, 10 m long

Application:

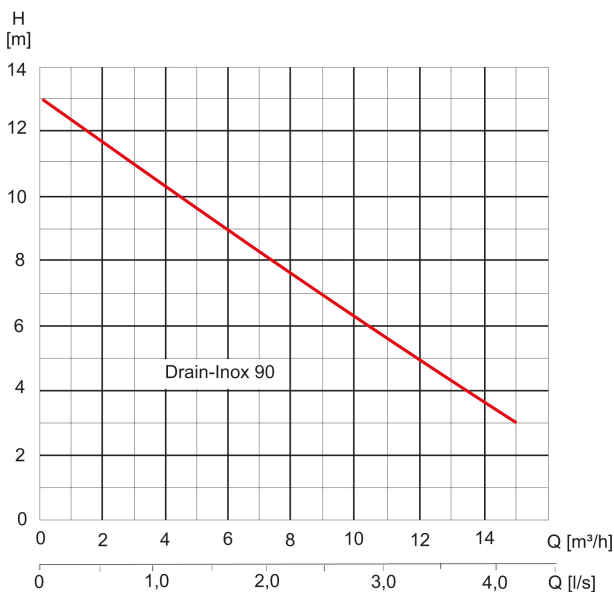
- Basement drainage
- Rainwater
- Manufacturing / industry
- Agriculture
- Suited for clear to slightly contaminated water with suspended solids (no stones) up to grain size of 10 mm, not for faeces-containing waste water.


Product benefits:

- Jacket cooled
- Corrosion-resistant and reliable
- Integrated motor protection
- Suited for ponds and brooks
- Light and robust design
- Temperature of the medium 35 °C, short-time 75 °C possible

Technical data:

Art.no.	U [V]	P ₁ [W]	I _n [A]	n [min ⁻¹]	Q _{max} [m ³ /h]	H _{max} [m]	SH [mm]	P0	D [mm]	H [mm]	Weight [kg]
19010	230	550	4,4	2800	15,0	13,0	10	RP 11/2	210	375	12

Characteristics:

Materials:

Material impeller:	stainless steel AISI 304
Seal motor:	mechanical seal carbon/ceramic/NBR
Seal pump:	mechanical seal SIC/SIC/NBR
Material motor housing:	stainless steel AISI 304
Material pump housing:	stainless steel AISI 304
Material motor shaft:	stainless steel AISI 304

Dimensions:

