

Features:

- Multi-stage submersible pump with integrated water-circulated motor
- Including mains cable H07 RNF, 20 m long
- Optionally with floating switch (type A)
- Immersion depth: Max. 20 m
- Impellers from fibre-glass reinforced Noryl®

Application:

- For open and drilled wells - well diameter 5" (127 mm)
- For general water supplies, pressure boost and irrigation
- Rainwater utilization
- Supply of clear water with low portion of aggressive and abrasive components




Product benefits:

- Optimum efficiency - due to water-cooled motor
- Plug & Pump (electrically pre-wired ready-to-plug)
- smoothly running
- optionally with floating switch (type A)

Technical data:

Art.no.	U [V]	P ₁ [W]	I _n [A]	n [min ⁻¹]	Q _{max} [m ³ /h]	H _{max} [m]	P0	D [mm]	H [mm]	Weight [kg]
18884	230	1.000	4,4	2850	5,7	45,0	RP 11/4	127	476	12

Characteristics:

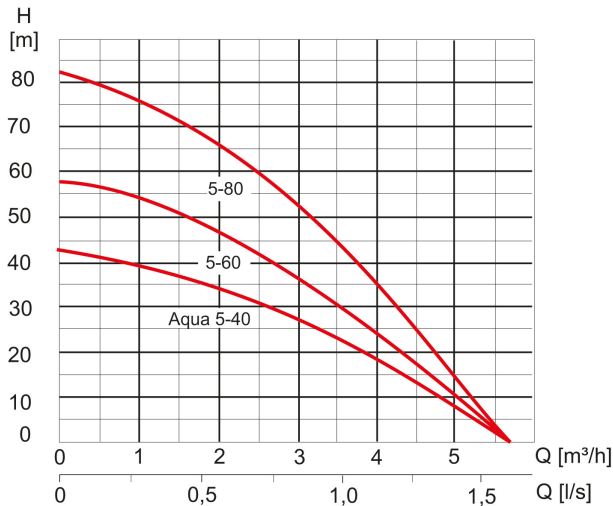

Materials:

Material impeller:	PPO GF20
Seal pump:	mechanical seal carbon/ceramic/NBR
Material motor housing:	stainless steel AISI 304
Material pump housing:	stainless steel AISI 304
Material motor shaft:	stainless steel AISI 420

Dimensions:

