

### Features:

- reduced noise during cutting
- adjustable cutting gap for permanently optimal cutting results
- optimized cutting system made of corrosion-resistant special steel 1.4112 with special hardness, wear resistance and cutting performance
- terpolymer container for direct connection to EURO-Toilets with minimum inlet height
- 4 additional lateral inlets DN 40 for connection of washbasin, shower or bidet
- container ventilation via active carbon filter
- robust, dry installed vortex pump with stainless steel cutting system
- alarm signal in case of fault
- emergency discharge possible via motor shaft with slot
- pressure outlet 1 ¼" IG with integrated non-return valve, optionally left or right
- operation temperature max. 40°C
- protection grade IP 54 - protected against splashing water

### Application:

- cuts wipes and female hygiene products
- particularly suitable for publicly accessible sanitary facilities
- single-toilet lifting unit for restricted domestic use according to EN 1825-3 below the backflow level e.g. in cellars or for the refurbishment of old buildings


### Scope of delivery:

- pre-assembled ready for connection with 1,5 m power cable and plug
- audible alarm included

### Technical data:

Art.no.	U [V]	P <sub>1</sub> [W]	P <sub>2</sub> [W]	In [A]	n [min <sup>-1</sup> ]	Q <sub>max</sub> [m <sup>3</sup> /h]	H <sub>max</sub> [m]	P0	Weight [kg]
18190	230	600	350	2,5	2800	7,5	11,8	G 11/4	11

### Characteristics:

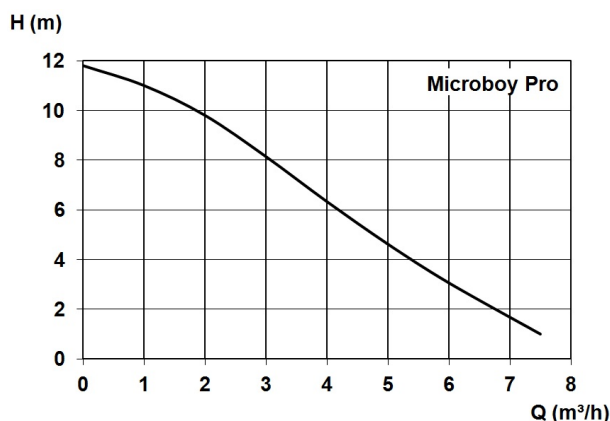

### Product benefits:

- high performance cutting system (cuts wet tissues and toiletries)
- dry-installed pump with stainless steel cutting system
- 4 additional lateral inlets
- integrated audible alarm
- end-to-end motor shaft for emergency drainage

### Materials:

Seal motor:	shaft seal
Seal pump:	mechanical seal
Material container:	ABS

**Dimensions:**

