

**Features:**

- plug-in compact system for automatic use of rainwater from a cistern
- automatic water feed from the drinking water network in case of water shortage and acoustic alarm message in case of overflow
- Collection container made of PE with assembled, multi-stage, low-noise centrifugal pump model CPS
- Suction height up to 8.5 m
- Quality motor with thermal overload protection
- Switching between rain water and drinking water - and vice versa - takes place automatically

**Application:**

- Garden irrigation
- Domestic water supply

**Scope of delivery:**

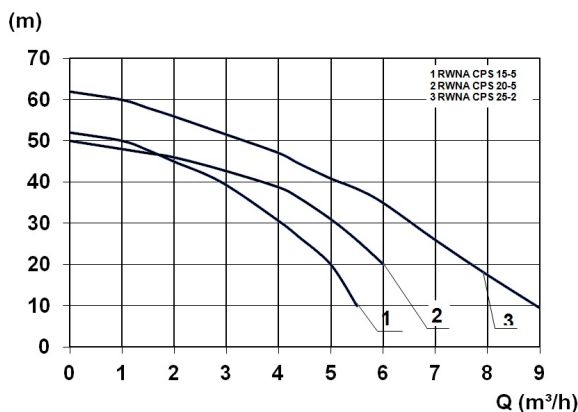
- plug-in system, including float switch with 20 m connection cable (for cistern), 2 pieces of flexible connection hoses
- 1 piece KG elbow DN 100 - 87° with overflow set Ø 110


**Product benefits:**

- plug-in, automatic rainwater utilisation system
- electronic Speed Control Comfort, in combination with the CPS pump, ensures performance- and noise-optimised operation
- acoustic alarm message with forwarding option
- Quick to assemble (plug & pump: connect > plug in > ready for operation)
- automatic water feed from the drinking water network in case of water shortage

**Technical data:**

Art.no.	U [V]	P <sub>1</sub> [W]	P <sub>2</sub> [W]	I <sub>n</sub> [A]	n [min <sup>-1</sup> ]	Q <sub>max</sub> [m <sup>3</sup> /h]	H <sub>max</sub> [m]	P0	Weight [kg]
20065	230	1.100	850	5,0	2850	4,0	50,0	G 11/4	31,1

**Characteristics:**


**Dimensions:**

