

### Features:

- submersible waste water pump aggressive media , made of corrosion- and shock-resistant polypropylene and particularly high-quality stainless steel
- built-in thermal winding protection for the prevention of overheating damage
- sealing by mechanical seal and additional shaft seal ring
- integrated vent screw
- horizontal pressure outlet 1 ¼" MPT
- automatic mode due lever float switch
- flat suction function due removable suction strainer
- continuous operation possible due to supplied locking device for the float switch
- incl. 10 m power cable and plug, non-return valve, Connection bend 90° 1 ¼" IT




### Application:

- pumping of slightly acidic condensate, aggressive or salty media (max. 15% salt content)
- portable pump for emergency drainage
- drainage of domestic waste water without faeces from showers, washing machines, washbasins etc.

### Technical data:

Art.no.	U [V]	P <sub>1</sub> [W]	P <sub>2</sub> [W]	I <sub>n</sub> [A]	n [min-1]	Q <sub>max</sub> [m <sup>3</sup> /h]	H <sub>max</sub> [m]	SH [mm]	PO	D [mm]	L [mm]	W [mm]	H [mm]	Weight [kg]
23018	230	400	200	1,4	2800	7,0	7,5	10	G 1 1/4	138	280	183	254	5

### Characteristics:

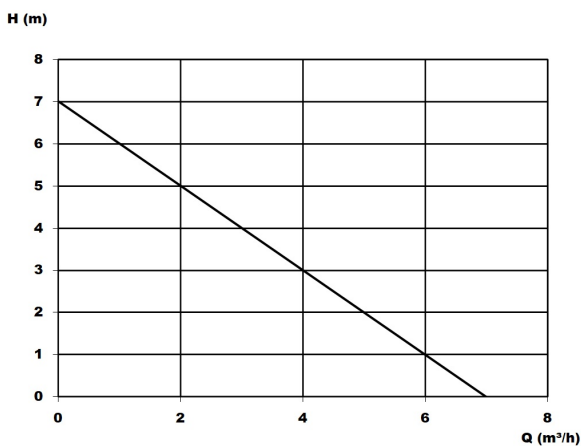

### Materials:

Material impeller:	PA6 GF25
Seal motor:	mechanical seal
Seal pump:	shaft seal
Material motor housing:	stainless steel AISI 316L
Material pump housing:	PP GF30
Material motor shaft:	stainless steel AISI 316L

Dimensions:

