

**Features:**

- the on/off control is done automatically by a robust float switch
- in case of pump failure (impermissibly high water level in the tank) an alarm switch can switch off the air conditioner or condensing boiler
- connection for pressure hose with 9 mm inner diameter
- tank volume 1,2 l
- operating temperature maximum 80°C S3 15% (1min 30 in function / 8min 30 stop)
- integrated non-return valve to prevent condensate return
- the device has an inlet with 28 mm diameter, if necessary use adapter DN 19, 32, 40
- System is equipped with wall mounting device


**Application:**

- drainage of condensation water and condensate from the climate control unit and the gas calorific value boilers with a pH-value up to 2.5

**Scope of delivery:**

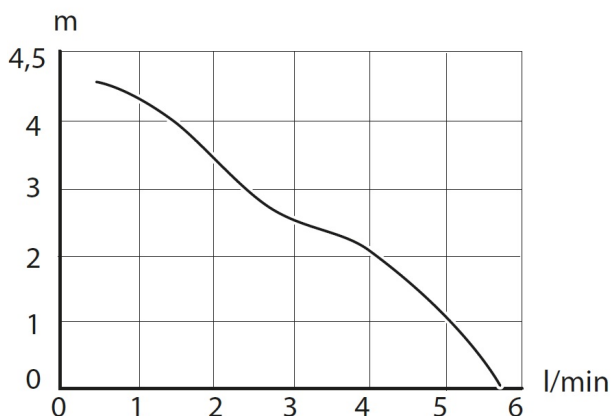
- 6 m hose with 9 mm inner diameter
- 2.0 m connection cable with safety plug
- 1,5 m cable for alarm circuit
- 1 inlet spigot
- 1 transition adapter hose /HT DN 50
- mounting screws

**Product benefits:**

- including alarm switch
- flexible connection options

**Technical data:**

Art.no.	U [V]	P <sub>1</sub> [W]	I <sub>n</sub> [A]	Q <sub>max</sub> [m <sup>3</sup> /h]	H <sub>max</sub> [m]	L [mm]	W [mm]	H [mm]	Weight [kg]
21842	230	60	0,52	0,34	4,5	287	127	160	2,6

**Characteristics:**


**Dimensions:**

