

Features:

- Multi-stage deep-well pump (230 V) with radial impellers, type Wellworker
- Electronic pressure switch with dry-running protection, type ZP Control 05 Comfort: exactly adjustable start pressure 0.5 - 4 bar Integrated dry-run protection, overcurrent protection, Auto-reset function
- Stainless steel rope with rope clamps, 10 m long
- Cable H07RNF, 20 m long

Application:

- For general water supplies and irrigation
- Supply of clear water with low portion of aggressive and abrasive components




Product benefits:

- Continuous operation
- Optimum efficiency
- Plug & Pump (electrically pre-wired ready-to-plug, complete with stainless steel rope)
- Automatic shaking function

Technical data:

Art.no.	U [V]	P ₁ [W]	I _n [A]	n [min ⁻¹]	Q _{max} [m ³ /h]	H _{max} [m]	P0	L [mm]	W [mm]	H [mm]	Weight [kg]
20341	230	370	4,0	2850	3,6	49,0	RP 11/2	99	99	643	15,7

Characteristics:

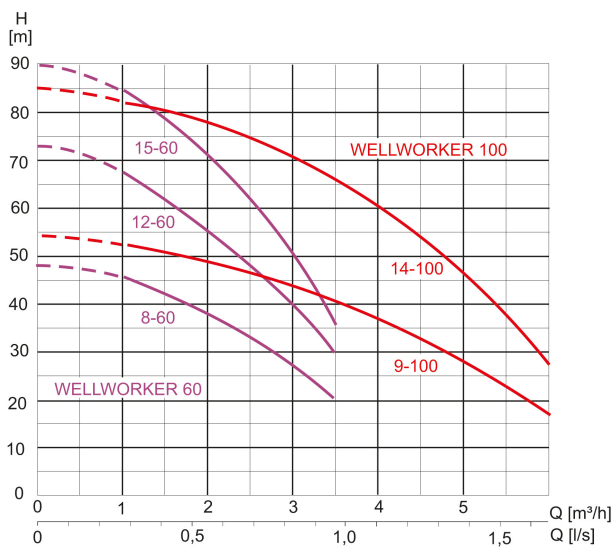

Materials:

Material impeller:	Noryl
Seal pump:	carbon/ceramic/NBR
Material motor housing:	stainless steel AISI 304
Material pump housing:	stainless steel AISI 304
Material motor shaft:	stainless steel AISI 304L