Rainwater harvesting

Tacomat 5 Basic

without level indicator for Combipress 60 and CPS pumps

Features:

- fully automatic, electronic control of the entire system
- for use with CPS 15/20/25 or Combipress 60 pumps
- demand-controlled potable water top-up within the building

Application:

- compact unit for automatic control and potable water top-up in rainwater harvesting systems
- single- or two-family houses

Scope of delivery:

- level transmitter with 25 m cable
- wall bracket set

Product benefits:

- plug-ready automatic control and potable water top-up unit
- compatible with various pump types
- high storage capacity and high flow rate enable the use of large pumps
- for easy retrofitting of existing horizontal centrifugal pumps
- integrated non-return valve for installation below the backflow level
- comfort version: level indication via an electronic pressure transducer, with connection options for a transfer pump or backflow monitor

Technical data:

Art.no.	U [V]	In [A]	L [mm]	W [mm]	H [mm]	Weight [kg]
20454	230	16	700	220	600	9

Example of installation:

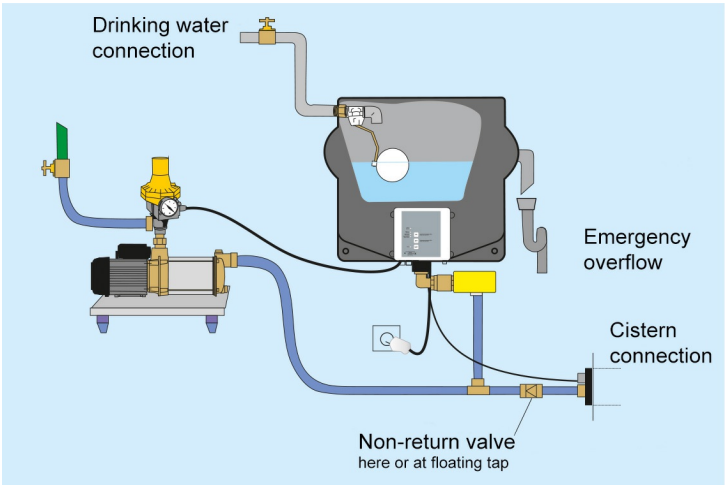

Zehnder Pumpen GmbH · Zwönitzer Str. 19 · 08344 Grünhain-Beierfeld · Phone: +49 37 74 / 52 - 100 · Telefax: +49 37 74 / 52 - 150 · e-mail: info@zehnder-pumpen.de

Dimensions:

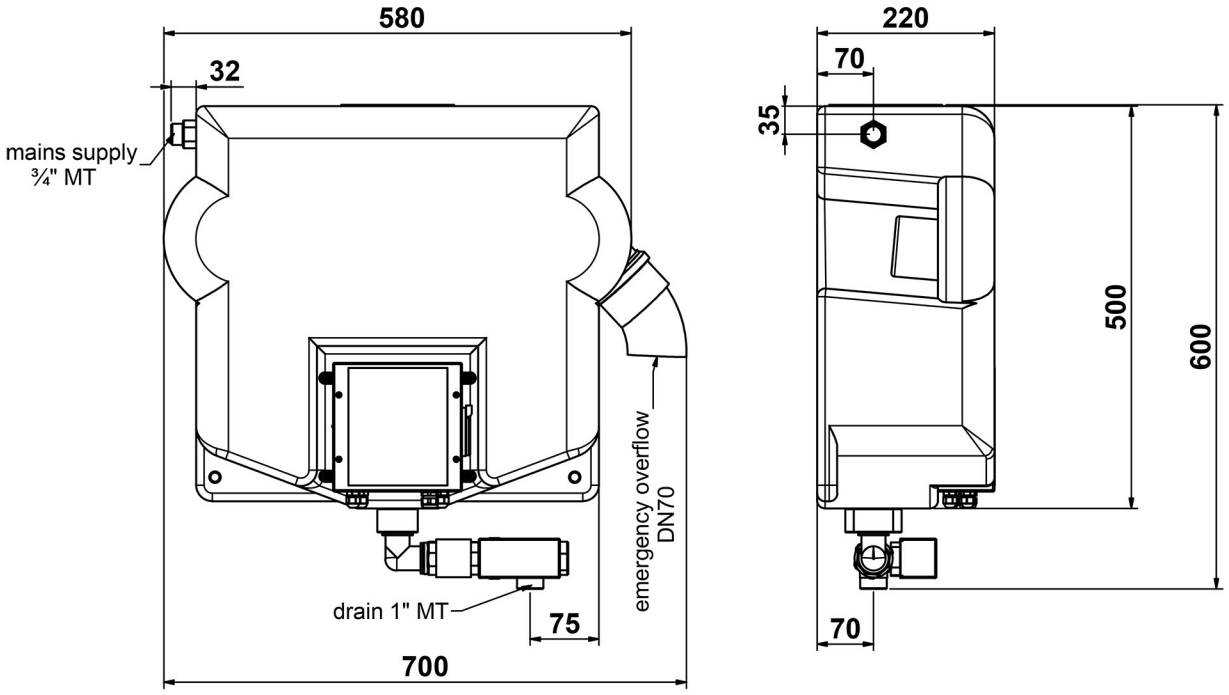
580
32
mains supply
¾" MT
drain 1" MT
75
700
emergency overflow
DN70
220
70
35
500
600
70